

Dry Ice Blasting Unit

ASCOJET Combi blaster 1708

complete (fully adjustable)

part no. 900480




The **ASCOJET Combi blaster 1708** is the first ASCOJET dry ice blasting unit which allows the use of an additional blasting material in the dry ice stream and therefore offers the best combination of gentle cleaning with dry ice pellets and the additional abrasive effect of a carefully selected additive.

Powerful, handy, minimal secondary pollution and reduced noise emission thanks to a low air consumption - The **ASCOJET Combi blaster 1708** is perfectly suitable for industrial end users of all kinds.

Powerful and handy blasting gun:

Thanks to a **quick connect coupling** the gun can be very easily attached to the blasting unit.

Increased security thanks to the **locking pin**, which makes a sudden opening of the locking mechanism of the nozzle impossible.

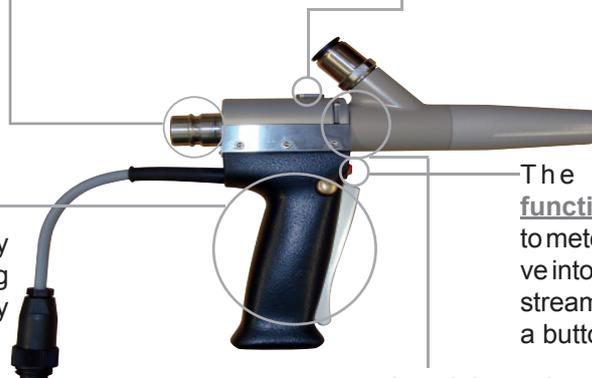

The **ergonomic gun handle** ensures very easy handling and comfortable operation when blasting over longer periods. The newly developed safety button is ideal for left and right hander.

The **ON/OFF function** enables to meter the additive into the blasting stream by pushing a button.

Specifications

Material:	frame, lateral, rear and front housing panels made of aluminium, powdercoated
Dimensions (L x W x H) incl. wheels and handle:	730 x 700 x 1'060 mm (28.74x 27.56x 41.73 in)
Weight empty:	approx. 84 kg (185.19 lbs)
Content of pellet hopper:	approx. 23 kg (50.7 lbs)
Content of box for additive:	approx. 5 kg (11 lbs) (depending on additive)
Blasting pressure with additive:	4 - 8 bar (58 - 116 psi) (adjustable)
Blasting pressure w/o additive:	0 - 10 bar (0 - 145 psi) (adjustable)
Dry ice consumption:	25 - 80 kg/h (55.12 - 176.37 in)(stepless)
Additive consumption:	approx. 30 kg/h (depending on blasting pressure)
Max. power consumption:	600 W nominal
Voltage:	230 V, 50/60 Hz, 1 Ph (other voltages on request)
Connection:	Input: 1" BSP

A **quick exchange system** allows nozzles to be changed within seconds without any tools.



Special features of ASCOJET Combi blaster 1708:



Powerful and handy blasting gun with quick connect coupling




Highly manoeuvrable



Integrated holding device for hose



Lightweight and compact



Quick connect coupling at blasting hose



Box for additive with approx. 5 kg capacity



Distributor unit for pulsation-free blasting



Insulated pellet hopper with 23 kg (50.71 lbs) capacity



Control panel for easy overview

Standardly included in the delivery of ASCOJET Combi blaster 1708:

Blasting gun additive OHP4

Standard for the ASCOJET 1708
incl. protective glove additive (part no. 4061690)

part no. 4061694



Blasting nozzle additive

Standard for the ASCOJET 1708

part no. 4061580



Hose assembly 7.5 m (24.6 ft) for OHP4 gun additive

Standard for the ASCOJET 1708

part no. 4061696



Protective hood for ASCOJET 1701 / 1708 / 2001RX

The newly developed hood for our blasting equipment protects the control elements from contamination. The transparent cover can be opened for easy view on and access to the operation elements. For cleaning the hood can easily be taken off.

part no. 4061493



Options for ASCOJET Combi blaster 1708 with additive:

Pos. 001

Spare parts kit ASCOJET Combi blaster 1708

Spare part kit containing the most important spare parts to ensure quick reaction for continuous operation.

Art.-Nr. 4047140



Options for ASCOJET Combi blaster 1708 w/o additive:

Pos. 001

Tool case OHP basic

Contains the entire nozzle assortment (excl. gun and standard barrel nozzle, part no. 918364), fits to OHP gun

Consists of 6 nozzles:

part no. 4045402, 4045403, 4047216, 4047141, 4047219, 4047220

OHP

part no. 4045870



Pos. 002

High performance barrel nozzle 709.17/14

Powerful and handy nozzle

Outlet opening: approx. Ø 14 mm (0.55 in)
Length: 17 cm (6.69 in)

OHP

part no. 4045402



Pos. 003

High performance barrel nozzle 709.23/154

Powerful and handy nozzle

Standard for the blasting gun OHP4

Most powerful nozzle of the ASCOJET single-hose system

Outlet opening: approx. Ø 15 mm (0.59 in)
Length: 23 cm (8.97 in)

OHP

part no. 4047144



Pos. 004

Barrel nozzle short 709.09/11

Powerful nozzle to clean in narrow spaces

Outlet opening: approx. Ø 11 mm (0.43 in)
Length: 9 cm (3.54 in)

OHP

part no. 4045403



Options for ASCOJET Combi blaster 1708 w/o additive:

Pos. 005

Flat nozzle 709.23/45

Powerful nozzle suitable for blasting large areas

Outlet opening: approx. 45 × 3.5 mm (1.77 x 0.14 in)
Length: 23 cm (8.97 in)

OHS
OHP

part no. 4047216



Pos. 006

Barrel nozzle special 709.42/15

The nozzle is designed to allow for a comfortable working position of the person in charge and is very powerful

Outlet opening: approx. Ø 15 mm (0.59 in)
Length: 42 cm (16.54 in)

OHP

part no. 4047141



Pos. 007

Angled nozzle 709.28/11/45°

A powerful nozzle for very confined spaces and difficult to reach spots

Outlet opening: approx. Ø 11 mm (0.43 in)
Length: 28 cm (10.97 in)

OHP

part no. 4047219



Pos. 008

Angled nozzle 709.25/11/75°

A powerful nozzle for very confined spaces and difficult to reach spots

Outlet opening: approx. Ø 11 mm (0.43 in)
Length: 25 cm (9.84 in)

OHP

part no. 4047220



Pos. 009

Tool case OHP basic empty

Empty tool case with matching insert

OHP

part no. 4045873



Pos. 010

Pellet cutter OHP

For sensitive blasting applications

With safety quick connect coupling, 2.5 m (8.2 ft) hose and control cable, grounded

OHP

part no. 4047257



Options for ASCOJET Combi blaster 1708 w/o additive:

Pos. 011

Blasting gun OHS6

Standard for the ASCOJET 908
Length: 26 cm (10.24 in)
Weight: 1.0 kg (2.2 lbs)
Blasting pressure: 0 - 7 bar (0-101.53 psi)

OHS

part no. 4047129



including the corresponding blasting nozzle

High performance barrel nozzle 708.15/13

Standard for the blasting gun OHS6
Powerful nozzle with low air consumption
Outlet opening: approx. Ø 13 mm (0.51 in)
Length: 15 cm (5.9 in)

part no. 4047025



Pos. 012

Hose assembly 5 m (16.4 ft) for OHS6 gun

Standard for the ASCOJET 908, can also be used as an extension of the hose assembly
incl. control cable, grounded

OHS

part no. 4047104



Pos. 013

Converter coupling ASCOJET 1701 - 908

This converter coupling makes it possible that the OHS6 gun with the corresponding blasting hose of the ASCOJET 908 can be connected to the ASCOJET 1701

OHS

part no. 4047040



Length: 7.8 cm (3.04 in)
Weight: 0.2 kg (0.44 lbs)
Outlet opening: approx. Ø 34 mm (1.34 in)

Pos. 014

Tool case OHS/OHP pro

Contains the entire nozzle assortment (excl. gun and standard barrel nozzle, part no. 917757), fits to OHS and OHP gun

Consists of 6 nozzles:
part no. 4047028, 4047228, 4047216, 4045402, 4047222, 4047223

OHS
OHP

part no. 4045871



Pos. 015

Barrel nozzle short 708.09/11

Powerful nozzle to clean in narrow places with low air consumption

Outlet opening: approx. Ø 11 mm (0.43 in)
Length: 9 cm (3.54 in)

OHS
OHP

part no. 4047028



Options for ASCOJET Combi blaster 1708 w/o additive:

Pos. 016

Barrel nozzle 707.09/10

Thanks to an inner diameter of only 7 mm (0.27 in) the barrel nozzle has a very economical air consumption but is nevertheless powerful

Outlet opening: approx. Ø 10 mm (0.39 in)
Length: 9 cm (3.54 in)

OHS
OHP

part no. 4047228



Pos. 017

Barrel nozzle 707.15/12

Thanks to an inner diameter of only 7 mm (0.27 in) the barrel nozzle has a very economical air consumption but is nevertheless powerful

Outlet opening: approx. Ø 12 mm (0.47 in)
Length: 15 cm (5.9 in)

OHS
OHP

part no. 4047321



Pos. 018

Angled nozzle 708.28/10/45°

A powerful nozzle for confined spaces with low air consumption

Outlet opening: approx. Ø 10 mm (0.39 in)
Length: 28 cm (10.97 in)

OHS
OHP

part no. 4047222



Pos. 019

Angled nozzle 708.25/10/75°

A powerful nozzle for confined spaces with low air consumption

Outlet opening: approx. Ø 10 mm (0.39 in)
Length: 25 cm (9.84 in)

OHS
OHP

part no. 4047223



Pos. 020

Tool case OHS/OHP pro empty

Empty tool case with matching insert

OHS
OHP

part no. 4045874



Pos. 021

Protective sleeve for one hose system

To protect the control cable and blasting hose from dirt and damages

Available in metres

OHS
OHP

part no. 4047265



Options for ASCOJET Combi blaster 1708 w/o additive:

Pos. 022

Compressed air hose 7.5 m (24.6 ft) / ID 25 mm (1 in)

Connecting hose between air compressor and dry ice blasting machine (ASCOJET), incl. claw coupling and safety ring for fast and easy connection / disconnection

Material: Fabric hose / metal

Dimension: 7.5 m (24.6 ft)

Weight: 2.4 kg (5.29 lbs)

part no. 4045944



Pos. 023

Claw coupling with 1 in (25 mm) male thread

For fast connection and disconnection of the air line to the blasting equipment

part no. 4045955

